

Masted forklifts
trucks

■ MA 460/470

- Capacity : 6000 kg and 7000 kg
- Lifting height : 4.00 m
- Engine turbo diesel : 101 hp/74,5 kw
- 4 wheel drive
- Hydrostatic transmission
- Bucket capacity* : 1.20 m³

ARTICULATED CHASSIS



*Bucket and T.I. in option.

MA 460-470



Load capacity

MA 4606000 kg
MA 4707000 kg
at 600 mm load centre.



Lifting height :4.00 m

Lifting speed (m/s) :
unladen/laden MA 460 :0.35/0.23
MA 470 :0.32/0.30

Lowering speed (m/s) :
unladen/laden MA 460/MA 470 :0.37/0.43



Tyres

Front :18 x 22.5 XF
Rear :18 x 22.5 XF



Forks (mm)

Length :1500
Width x thickness :150 X 70



Brakeshydraulically operated



PERKINS engine.....1104C.44 T

Bore and stroke :105x127
Capacity :4 cyl. - 4400 cm³
Rated speed :2200 r.p.m.
Power (ISO/TR 14396) :101 HP (74.5 kw)
Max.torque :412 Nm at 1400 r.p.m.
Direct injection
Water cooling



TransmissionHydrostatic

2 speed forward and reverse
Travel speed :25 km/h
Electromagnetic reversing shift



Hydraulics

Main pump (lifting/tilting) 1st :
Gear type :200 bars /92 l/mn
Steering pump
Gear type :175 bars /92 l/mn



Capacities


Cooling system.....15 l.
Engine oil.....11.5 l.
Hydraulic oil144 l.
Transmission oil.....3 l.
Fuel tank121 l.




Weight (with forks) MA 4609200 kg
MA 470.....9670 kg

Mast	Overall height mast lowered (mm)		Overall height mast extended (mm)	
	with kit	without kit	with kit	without kit
3.60 m	3235	3210	5035	5010
4.00 m	3435	3410	5435	5410
4.50 m	3685	3660	5935	5910


	MA 460	MA 470
Draw bar pull (laden)	8200 daN	8200 daN

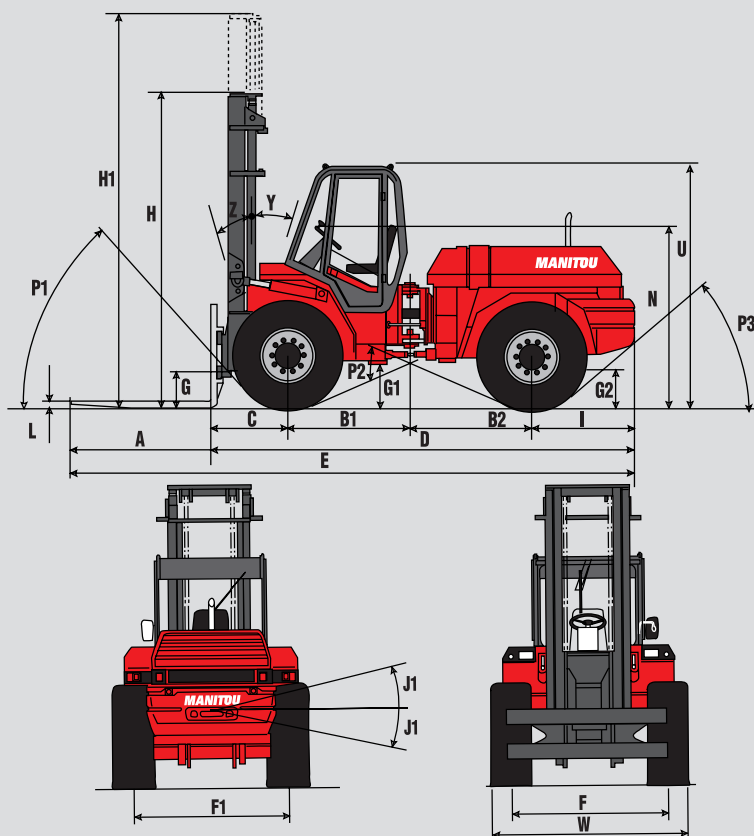


A	1500
B1	1300
B2	1300
C	817
D	4517
E	6017
F	1740
F1	1740
G	360
G1	480
G2	410
H	3410
H1	5410
I	1100
J	40°
J1	13°
K	1750
L	70
N	1960
O	150
P1	55°/122%
P2	48°/111%
P3	38°/78%
R	4415
S	7308
T	3272
U	2565
V	4990
V1	2430
W	2180
Y	12°
Z	17°

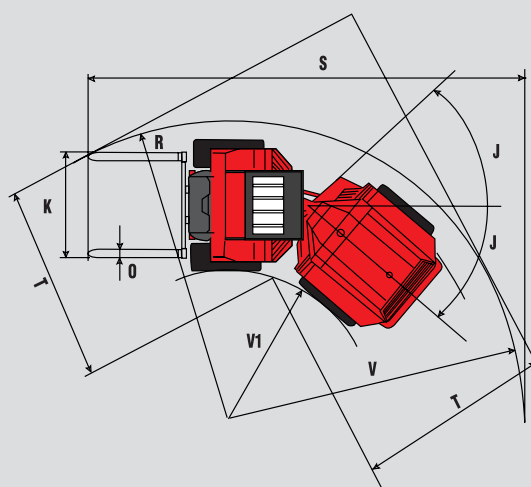

MA 460



MA 470



This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700131EN-B - 11/07 - BI - 004/Ind E



MANITOU